

HORSELEY DENTAL

Tel: 02-8717 6500

Toll Free: 1300-130-718

E-mail: orders@horseley.com.au

Website: www.horseley.com.au

Equipment

February 2023



**FREE
FREIGHT**

for orders over \$300.⁰⁰

ALL PRICES GST INCLUSIVE prices and offers subject to change without notice

OFFERS ARE NOT VALID IN CONJUNCTION WITH ANY OTHER SPECIAL/BONUS OFFERS AND SUBJECT TO STOCK AVAILABILITY

Goods sold are not returnable without prior approval. Returns and claims must be made within 10 days of delivery. Costs incurred by return goods will be at the sender's expense. Goods returned for credit or exchange must be unmarked and in a saleable condition.

All accounts are strictly 30 days from invoice date. We reserve the right to charge 2% interest per month on overdue accounts.

precisionplus™

LOW SPEED HANDPIECES AND AIR MOTOR



L10-1
Straight
Handpiece
1:1 Standard
\$115.50



L20-4P
Push Button
CA Handpiece
4:1 Reduction
\$198.00



L20-1L
Latch
CA Handpiece
1:1 Standard
\$99.55



L20-4PM
Push Button Mini Head
CA Handpiece
4:1 Reduction
\$198.00



L20-1P
Push Button
CA Handpiece
1:1 Standard
\$148.50



L30
Air Motor (4 holes)
20,000 r.p.m.
\$165.00



L20-1PM
Push Button Mini Head
CA Handpiece
1:1 Standard
\$165.00

Spare Heads

L20L-A Latch \$49.50
L20P-A Push Button \$68.75
L20PM-A Push Button Mini \$79.75

12 MONTH WARRANTY

PROPHY LOW SPEED HANDPIECES



L20-1PY (SS)
Screw-In / Snap-On
CA Handpiece
1:1 Standard
\$165.00



L20-4PY (R)
60° Turn Reciprocating
Push Button Standard Head
CA Handpiece
4:1 Reduction
\$198.00



L20-4PY (SS)
Screw-In / Snap-On
CA Handpiece
4:1 Reduction
\$198.00.00



L20-4PY (RM)
60° Turn Reciprocating
Push Button Mini Head
CA Handpiece
4:1 Reduction
\$198.00



Prophy Angle



L10-4PY
Prophy Angle
Straight Handpiece
4:1 Reduction
\$165.00

Spare Heads

L20SS-A Screw-In / Snap-On \$68.75
L20PY (R)-A Reciprocating \$68.75
L20PY (RM)-A Reciprocating Mini ... \$79.75

HIGH SPEED TURBINE STANDARD CONNECTION



**T90P HIGH TORQUE
PUSH BUTTON**

Torque Power: 22 Watts
Speed: 350,000 r.p.m. ±10%

- Anti-retraction
- Ceramic Bearings
- Stainless steel head
- Ergonomic design
- Quiet operation noise level, less than 65 dB
- Autoclavable up to 134°C
- Midwest 4 holes

TURBINE STANDARD CONNECTION

T90P High Torque **Push Button** (Midwest 4 Holes) ... **\$198.00**
T90P(A) High Torque **PB** Cartridge **\$99.55**

12 MONTH WARRANTY



HIGH SPEED TURBINE QUICK DISCONNECT



**T90+QK HIGH TORQUE
PUSH BUTTON**

Torque Power: 22 Watts
Speed: 350,000 r.p.m. ±10%

NON LED QUICK COUPLING



**QK KaVo¹ Type
with Spray Adjustment**

- Anti-retraction
- Ceramic Bearings
- Stainless steel head
- Quiet operation noise level, less than 65 dB
- Ergonomic design
- Autoclavable up to 134°C
- KaVo¹ type fitting

NON LED HIGH TORQUE TURBINE QUICK DISCONNECT

T90+QK KaVo¹ Type (without Coupling) **\$599.50**
T90+(A) High Torque **PB** Cartridge **\$299.75**

NON LED QUICK COUPLING

QK KaVo¹ Type (non LED) w Spray Adjustment ... **\$198.00**

LED HIGH SPEED TURBINE QUICK DISCONNECT



**T90+LK HIGH TORQUE
PUSH BUTTON**

Torque Power: 22 Watts
Speed: 350,000 r.p.m. ±10%



LED QUICK COUPLING



**LK KaVo¹ Type
with Spray Adjustment**

- LED Fibre Optic
- Anti-retraction
- Ceramic Bearings
- Stainless steel head
- Quiet operation noise level, less than 65 dB
- Ergonomic design
- Autoclavable up to 134°C
- KaVo¹ type fitting

LED HIGH TORQUE TURBINE QUICK DISCONNECT

T90+LK KaVo¹ Type (without Coupling) **\$687.50**
T90+(A) High Torque **PB** Cartridge **\$299.75**

LED QUICK COUPLING

LK KaVo¹ Type (LED) w Spray Adjustment **\$247.50**

1. KAVO is a registered trademark of Kavo Dental GmbH Germany

LED LIGHT BULBS

Life 200 times longer than halogen bulb, brighter light, Simple, Sterilizable, Less self-heating, Less wattage, Durable, Superior light quality ...
Natural Daylight quality will let you NEVER want to go back to Halogen again!



KaVo MULTIflex LUX® Type **\$38.50**
W&H LED Type **\$99.50**



1 x LED
= Over 25 X Halogens

- Semiconductor LED
- Optimal 25,000 Lux illumination
- Daylight neutral 5,900-6,000 K colour temperature
- Voltage range 3.0 - 3.6 V DC
- Lifespan (Lifetime) > 10,000 hours
- Power Consumption < 50 mA

Lamp socket fitting tailored to handpieces or couplings. Please observe correct orientation to ensure correct electrical polarity.
If the LED shines red or not at all, remove and rotate the LED through 180 degrees, then replace

BEING AIR MOTOR AND LOW SPEED HANDPIECES 'E' FITTING INTERNAL SPRAY

INTERNAL SPRAY		FIBRE OPTIC INTERNAL SPRAY	
	202CAP Push Button CA 1:1 Standard \$248.50		202CAP-B Push Button CA F.O. 1:1 Standard \$396.00
	202CAP-R4 Push Button CA 4:1 Reduction \$330.00		202CAP-R4-B Push Button CA F.O. 4:1 Reduction \$495.00
	202SH Straight 1:1 Standard \$248.50		202SH-B Straight F.O. 1:1 Standard \$396.00
	202AM-M4 Air Motor 4 Holes 24,000 r.p.m. \$275.00		202AM-M4-B F.O. Air Motor 4 Holes 24,000 r.p.m. \$445.50

12 MONTH WARRANTY

**Buy 5
get
1 FREE**
(same item)

BEING LOW SPEED HANDPIECE AND HEADS INTERNAL SPRAY

	202CAP-A3 Push Button Head CA \$99.55		201CA-R CA Handpiece Push Button 4:1 Reduction \$198.00
	202EN60 Twist Head CA 60° Right and Left \$115.50		
	202POL-S-R2 Propyl Head CA 2:1 Reduction \$165.00		

12 MONTH WARRANTY

**CLEARANCE
SALE**
50% OFF
MARKED PRICE
[offer subject to
stock availability]

MODERN FULL TITANIUM TURBINES STANDARD CERAMIC BEARINGS

	HIGH TORQUE (16K) Torque Power: 22 Watts Speed: 350,000 r.p.m.	<ul style="list-style-type: none"> • Barden ceramic bearings, durable lifetime • Quiet operation, noise level less than 60dB • Ergonomic design • Anti-retraction system • 3 port spray • Titanium alloy body • Autoclavable to 134°C
	STANDARD HEAD (18K) Torque Power: 19 Watts Speed: 400,000 r.p.m.	
<p>High Torque (22 watts) Speed 350,000 r.p.m. AIR-16KN Ti Titanium Turbine NSK® Type \$599.50</p> <p>Standard Head (19 watts) Speed 400,000 r.p.m. AIR-18KN Ti Titanium Turbine NSK® Type \$599.50</p> <p>Cartridge 16K High Torque \$346.50 18K Standard Head \$346.50</p>		

12 MONTH WARRANTY

**CLEARANCE
SALE**
50% OFF
MARKED PRICE
[offer subject to
stock availability]



EyeSpecial C-IV

Smart Dental Camera
Designed for the Entire Team

FAST Precise
Versatile

Shofu's Gen 4 smart digital dental camera - EyeSpecial C-IV is developed exclusively for predictable and consistent clinical photographs for everyday dentistry. Equipped with state-of-the-art digital technology, this foolproof, user-friendly dental camera meets user-specific needs ranging from case and legal documentation, diagnosis and treatment planning, patient communication and education, insurance verification, dental lab and specialist collaboration.

EyeSpecial Features...

9 pre-set dental shooting modes. Compact, ultra-light & easy to hold with one hand. Fast auto-focus with built-in anti-shake with image stabilization and anti-reflection features. Cutting edge Flashmatic System for True-colour reproduction with blockout of ambient light. Water, chemical and scratch resistant to prevent cross contamination. Brilliant display with fast & intuitive menu navigation. Video function, Micro HDMI connector, QR code features, and Trigger Flash Mode for portrait photography. Optional attachable cross polarizer.




Easy, Intuitive Navigation

Operating EyeSpecial C-IV is virtually effort less and eliminates the need for prior photography knowledge or extensive training. The high-resolution 3.5" LCD touch screen panel with an intuitive menu and simple, uncomplicated icons guides users to easily select the appropriate option and capture consistent, quality clinical photos. Images can be instantly viewed on the display, assessed, edited with draw-edit function, communicated and archived conveniently.

Compact and Convenient

This ultralight, high-performance camera is ready to use, right out-of-the-box without requiring any "heavyweight" accessories such as external flashes or interchangeable lenses. Easily operated with just one hand, it frees up the other to hold the cheek retractor or mirror during the dental photography.

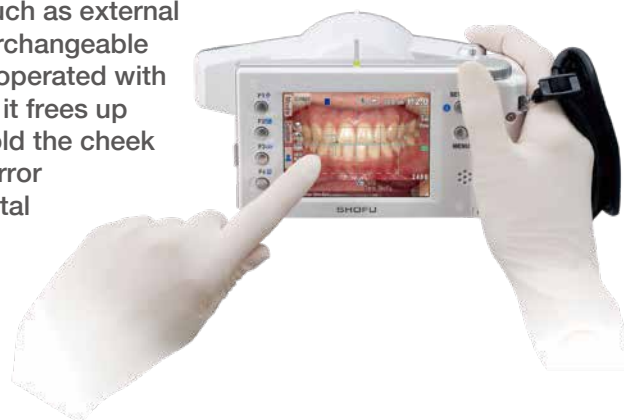

E0021
EyeSpecial C-IV
\$6,875.00/unit

SPECIAL
\$5,995.00
per unit

PN E0021 Camera EyeSpecial C-IV complete with:-

- | | |
|----------------------------------|----------------|
| Close up lens (49 mm) from Kenko | Lens cap |
| 16 GB SDHC memory card | Hand strap |
| SHOFU gray card | User's manual |
| Quick reference and instructions | 4 AA batteries |

E0022 Cross Polarizer **\$995.50**

C01-M/C02-M LED CURING LIGHTS MINI (with USB charger)

- 360° Rotatable tips
- Automatic compensation circuit for constant power output
- Fully covered membrane panel for easy cleaning and infection control
- Light weight: approx. 85 gms
- Dual modes: FULL / SOFT
- 12 Operation times
- Fully charged battery provides over 100 x 10 second curing cycles

C01-M / C02-M SPECIFICATIONS			
Model		C01-M (F.O. Light Guide)	C02-M (Direct Light Source)
LIGHT TIP		8 mm (dia.)	11 mm (dia.)
LIGHT WAVELENGTH		440~480 nm	440~480 nm
MODE	FULL	1,200 mW/cm ² for 5, 10, 15, 20, 25, 30 seconds±10%	
	SOFT	1 st five seconds from 0-900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%	
WEIGHT		86 gms	84 gms
LENGTH		230 mm	220 mm

C01-M / C02-M CURING LIGHT DEPTH OF CURE						
MODEL MODE	C01-M (F.O. Light Guide) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C02-M (Direct Light Source) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
FULL	10 seconds	4.3 mm	2.15 mm	10 seconds	5.1 mm	2.55 mm
SOFT	15 seconds	4.6 mm	2.30 mm	15 seconds	4.8 mm	2.40 mm

REMARKS: Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine the curing times required.



C01-M Curing Light (F.O. Light Guide) with USB Charger \$247.50
 C02-M Curing Light (Direct Light Head) with USB Charger .. \$275.00
 C01-M F.O. Light Guide 8 mm \$59.95
 C02-M Direct Light Head 11 mm \$88.55
 C01-M/C02-M Replacement Battery \$49.50
 228 Light Sleeves Mini 500 pcs/box \$49.50
 USB Charger \$9.90

24 MONTH WARRANTY



063 Light Protective Hand Shield
 \$38.50

C01-M/C02-M
 For every
 Curing Light purchased
 get
 one 063 Hand Shield
 FREE



C01 LED CURING LIGHTS with fibre optic light guides

C01 SPECIFICATIONS			
Model	C01-C (classic)	C01-S (super power)	C01-D (dual range)
F.O. LIGHT GUIDE	8 mm (dia.)	11 mm (dia.)	
LIGHT WAVELENGTH	440~480 nm	440~480 nm	440~480 nm
APPLICATION	General	Ortho / General	General / Ortho
MODE	TACK	N/A	900 mW/cm ² for 1 second±10%
	TURBO	1,500 mW/cm ² for 5 seconds ±10%	2,000 mW/cm ² for 4 seconds±10%
	3' + 3'	N/A	2,000 mW/cm ² for 3 + 3 seconds±10% (with 1 second blink in between)
	6' + 6'	N/A	1,500 mW/cm ² for 6 + 6 seconds±10% (with 1 second blink in between)
	FULL	1,200 mW/cm ² for 5, 10, 15, 20 seconds±10%	
	RAMP	1 st five seconds from 0-1,200 mW/cm ² next 5, 10, 15, 20 seconds 1,200 mW/cm ² ±10%	
	SOFT CURE	1 st five seconds from 0-900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%	
WEIGHT	205 gms	200 gms	200 gms
LENGTH	260 mm	265 mm	265 mm

CURING LIGHT MODE APPLICATIONS	
TACK	A very short initial cure for temporary processing before the final cure. For example when removing excess materials whilst bonding veneers or using temporary cement. Tack rings are included inside the box.
TURBO	Super fast curing for resin and composite that is no more than 2 mm thick. Also recommended for ceramic brackets, bonding veneers etc.
3' + 3'	3 Second Mesial + 3 Second Distal for metal brackets resin bonding (with 1 second blink in-between)
6' + 6'	6 Second Mesial + 6 Second Distal for metal brackets with bonding resin requiring more curing time and for buccal tube bonding (with 1 second blink in-between)
FULL	For general applications
RAMP	First 0-5 seconds are ramped for general application.
SOFT CURE	First 0-5 seconds are ramped for more gentle processing, designed for patients sensitive to heat.

AUTOCLAVABLE
FIBRE OPTIC
LIGHT GUIDE
CAN BE
ROTATED 360°

AUTOMATIC
COMPENSATION
CIRCUIT FOR
CONSTANT
POWER OUTPUT

FULLY COVERED
MEMBRANE PANEL
FOR EASY CLEANING
AND INFECTION
CONTROL

SIZE:
L265 x Dia.27 (mm)

REPLACEABLE
BATTERY
OPENING

ON/OFF
SWITCH

DISPLAY
SCREEN

TIME
SWITCH

MODE
INDICATORS

MODE
SWITCH

A FULL CHARGE
OF BATTERY
CAN BE USED
MORE THAN
100 TIMES WHEN
SET AT 10 SECOND
TIME MODE

C01 Complete Set
with Built-In
Light Intensity
Indicator





063
Protective Hand
Light Shield
\$38.50

C01-C Curing Light (Classic) with 8 mm Light Guide \$385.00
C01-S Curing Light (Super Power) with 11 mm Light Guide \$495.00
C01-D Curing Light (Dual Range) with 11 mm Light Guide \$495.00
C01-C-1 8 mm Fibre Optic Light Guide \$59.95
C01-S/D-1 11 mm Fibre Optic Light Guide \$148.50
C01/2-1 Replacement Battery \$59.95
123S Light Sleeves Small (for C01-C) 500 pcs/box \$49.50
123L Light Sleeves Large (for C01-S/C01-D) 500 pcs/box \$55.55

24 MONTH WARRANTY

For every
C01 Curing Light
purchased (any model)
get
one 063 Hand Shield
FREE

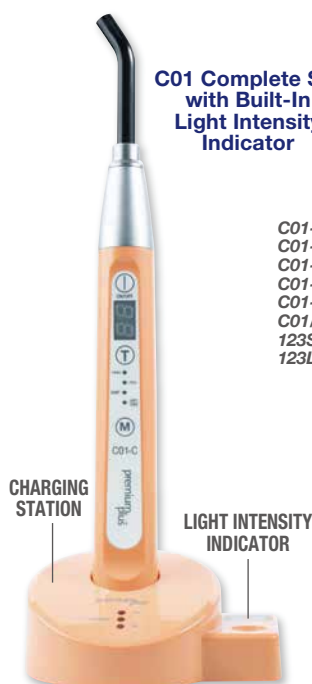

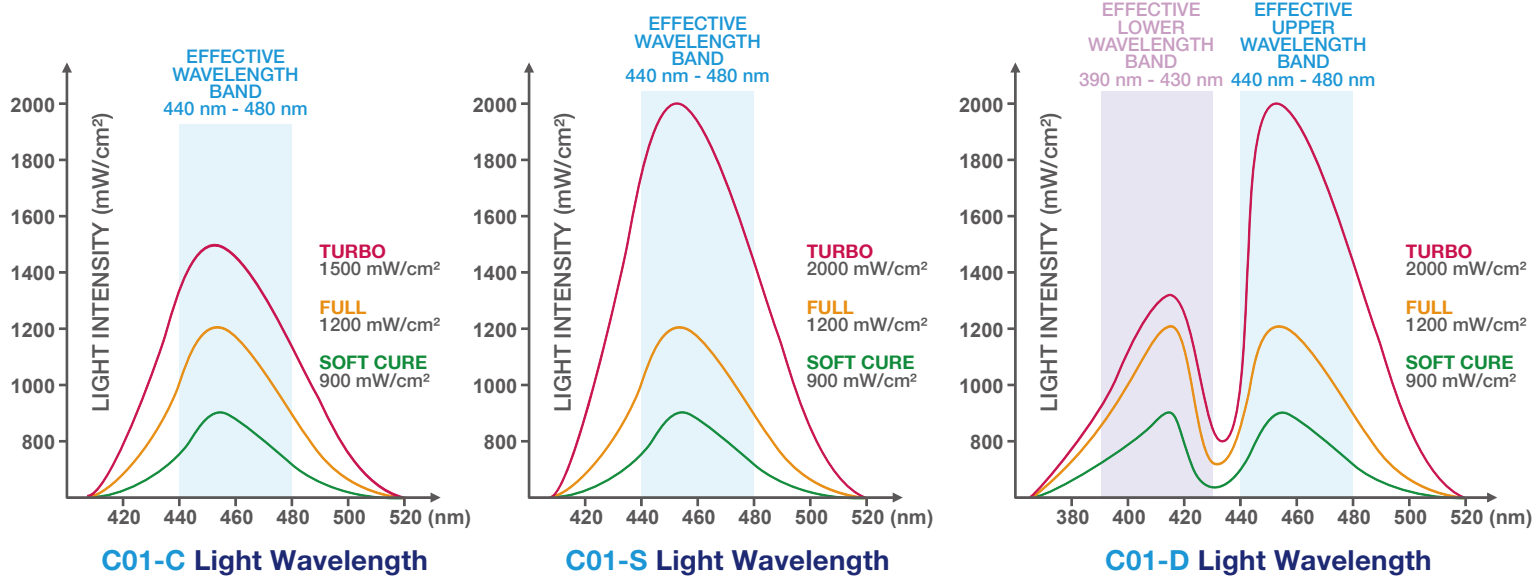

C01-C / C01-S / C01-D CURING LIGHT DEPTH OF CURE

MODEL	C01-C (classic) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C01-S (super power) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C01-D (dual range) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
TURBO	5 seconds	4.2 mm	2.10 mm	4 seconds	4.6 mm	2.30 mm	4 seconds	4.3 mm	2.15 mm
FULL	10 seconds	4.3 mm	2.15 mm	10 seconds	5.1 mm	2.55 mm	10 seconds	4.4 mm	2.20 mm
RAMP	10 seconds	4.1 mm	2.05 mm	10 seconds	5.0 mm	2.50 mm	10 seconds	4.2 mm	2.10 mm
SOFT CURE	15 seconds	4.6 mm	2.30 mm	15 seconds	4.8 mm	2.40 mm	15 seconds	4.6 mm	2.30 mm

REMARKS: Above data is based on test results using an A2 shade composite. The light guide tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is strongly recommended that you should test your composite and resin performance to determine the curing times required.

Data is only for reference, always follow the instructions from your resin and composite manufacturers.

- There are many variables (distance and angle between the light tip and composite, area, shade, thickness and type etc.) affecting composite curing times. It is recommended to place and cure a maximum of 2 mm for each composite placement.
- Using a barrier sleeve on the curing light will reduce 5-10% of light intensity.
- The light guide tip should be placed approximately 1-2 mm above the composite or resin and pointed perpendicular to the tooth surface.
- High intensity curing lights produce more heat. This is a direct indication of the power of the light being emitted. When using the device for more than 10 seconds, do not keep the light tip in one position. It is always recommended to use a dental syringe to blow a cold air flow on the area during long periods of curing. This will maintain a lower temperature for the composite and surrounding area, particularly when using rubber dam so as to avoid any rubber dam breakage due to heat built-up.
- Do not expose soft tissue to the light being emitted for more than 2 seconds or burns may occur.
- Avoid the light guide tip coming into contact with any soft tissue in the mouth.

12 colours available:



C02 LED CURING LIGHTS 90° right angle direct light source head

LOW PROFILE HEAD
FOR ACCESSING
HARD-TO-REACH AREAS

12 mm

STAINLESS
STEEL
HEAD
FOR
DURABILITY

HARDENED
GLASS LENS
COLLIMATED
UNIFORM
STRAIGHT
LIGHT BEAM

LIGHT GUIDE
CAN BE
ROTATED 360°

ON/OFF
SWITCH

DISPLAY
SCREEN

TIME
SWITCH

MODE
INDICATORS

MODE
SWITCH

FULLY COVERED
MEMBRANE PANEL
FOR EASY CLEANING
AND INFECTION
CONTROL

C02-C

premium
plus

A FULL CHARGE
OF BATTERY
CAN BE USED
MORE THAN
100 TIMES WHEN
SET AT 10 SECOND
TIME MODE

SIZE:
L255 x Dia.27 (mm)

REPLACEABLE
BATTERY
OPENING

C02 SPECIFICATIONS

Model	C02-C (classic)	C02-S (super power)	C02-D (dual range)
DIRECT LIGHT HEAD	10 mm (dia.)		
LIGHT WAVELENGTH	440~480 nm	440~480 nm	440~480 nm
APPLICATION	General	Ortho / General	General / Ortho
MODE	TACK	900 mW/cm ² for 1 second±10%	
	TURBO	1,500 mW/cm ² for 5 seconds ±10%	
	3' + 3'	2,000 mW/cm ² for 3 + 3 seconds±10% (with 1 second blink in between)	
	6' + 6'	1,500 mW/cm ² for 6 + 6 seconds±10% (with 1 second blink in between)	
	FULL	1,200 mW/cm ² for 5, 10, 15, 20 seconds±10%	
	RAMP	1 st five seconds from 0-1,200 mW/cm ² next 5, 10, 15, 20 seconds 1,200 mW/cm ² ±10%	
	SOFT CURE	1 st five seconds from 0-900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%	
WEIGHT	185 gms	185 gms	185 gms
LENGTH	255 mm	255 mm	255 mm

CURING LIGHT MODE APPLICATIONS

TACK	A very short initial cure for temporary processing before the final cure. For example when removing excess materials whilst bonding veneers or using temporary cement. Tack rings are included inside the box.
TURBO	Super fast curing for resin and composite that is no more than 2 mm thick. Also recommended for ceramic brackets, bonding veneers etc.
3' + 3'	3 Second Mesial + 3 Second Distal for metal brackets resin bonding (with 1 second blink in-between)
6' + 6'	6 Second Mesial + 6 Second Distal for metal brackets with bonding resin requiring more curing time and for buccal tube bonding (with 1 second blink in-between)
FULL	For general applications
RAMP	First 0-5 seconds are ramped for general application.
SOFT CURE	First 0-5 seconds are ramped for more gentle processing, designed for patients sensitive to heat.

C02 Complete Set
with Built-In
Light Intensity
Indicator




063
Protective Hand
Light Shield
\$38.50

C02-C (Classic) Curing Light with 10 mm Light Head \$385.00
C02-S (Super Power) Curing Light with 10 mm Light Head \$495.00
C02-D (Dual Range) Curing Light with 10 mm Light Head \$495.00
C02-C-1 (Classic) Direct Light Source Head \$99.95
C02-S-1 (Super Power) Direct Light Source Head \$148.50
C02-D-1 (Dual Range) Direct Light Source Head \$148.50
C01/2-1 Replacement Battery \$59.95
125 Light Sleeves (for C02-C/S/D) 500 pcs/box \$49.50

24 MONTH WARRANTY

For every
C02 Curing Light
purchased (any model)
get
one 063 Hand Shield
FREE



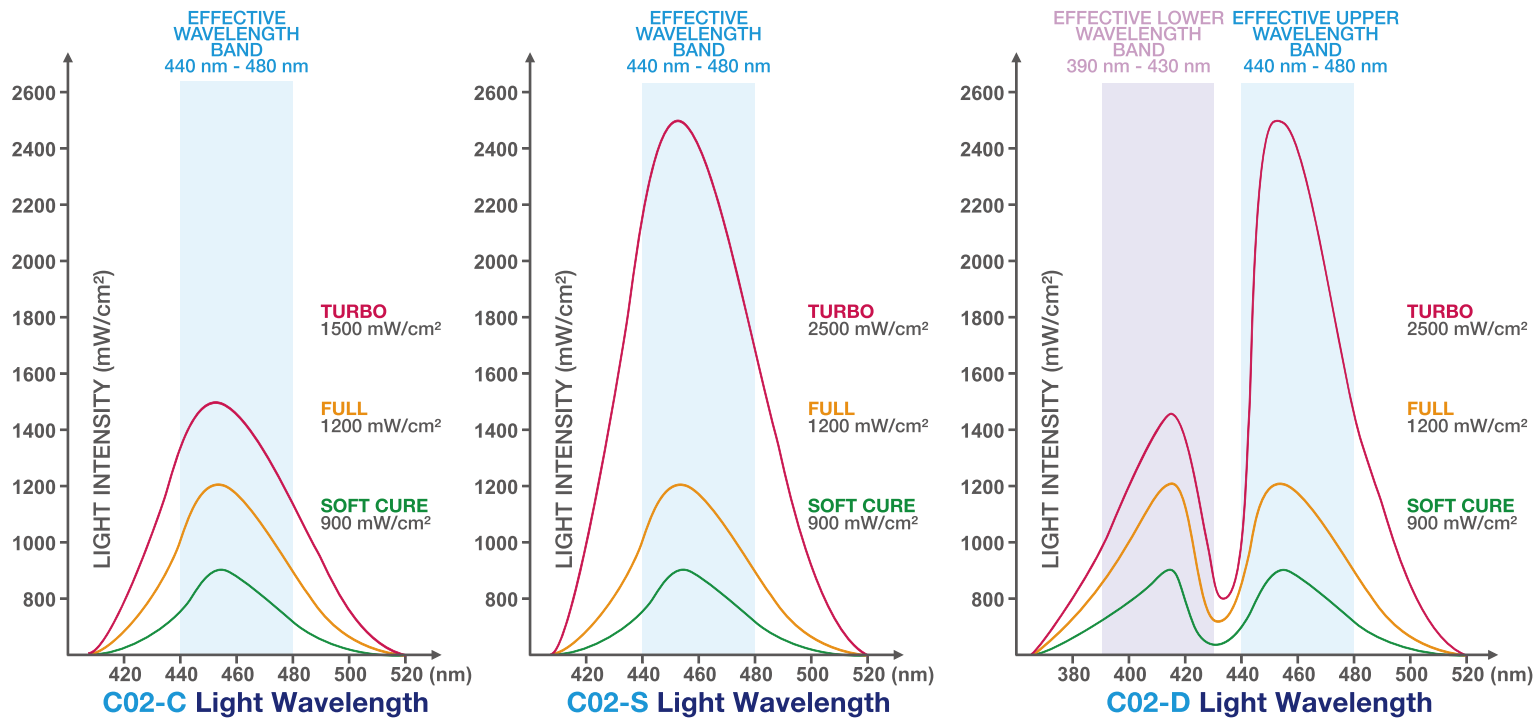

C02-C / C02-S / C02-D CURING LIGHT DEPTH OF CURE									
MODEL	C02-C (classic) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (~50%)	C02-S (super power) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (~50%)	C02-D (dual range) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (~50%)
TURBO	5 seconds	4.4 mm	2.20 mm	3 seconds	4.6 mm	2.30 mm	3 seconds	4.5 mm	2.25 mm
FULL	10 seconds	5.1 mm	2.55 mm	10 seconds	5.3 mm	2.65 mm	10 seconds	5.2 mm	2.60 mm
RAMP	10 seconds	4.8 mm	2.40 mm	10 seconds	5.3 mm	2.65 mm	10 seconds	4.9 mm	2.45 mm
SOFT CURE	15 seconds	5.0 mm	2.50 mm	15 seconds	5.4 mm	2.70 mm	15 seconds	5.1 mm	2.55 mm

REMARKS: Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is strongly recommended that you should test your composite and resin performance to determine the curing times required.

Data is only for reference, always follow the instructions from your resin and composite manufacturers.

- There are many variables (distance and angle between the light tip and composite, area, shade, thickness and type etc.) affecting composite curing times. It is recommended to place and cure a maximum of 2 mm for each composite placement.
- Using a barrier sleeve on the curing light will reduce 5-10% of light intensity.
- The light tip should be placed approximately 1-2 mm above the composite or resin and pointed perpendicular to the tooth surface.
- High intensity curing lights produce more heat. This is a direct indication of the power of the light being emitted. When using the device for more than 10 seconds, do not keep the light tip in one position. It is always recommended to use a dental syringe to blow a cold air flow on the area during long periods of curing. This will maintain a lower temperature for the composite and surrounding area, particularly when using rubber dam so as to avoid any rubber dam breakage due to heat built-up.
- Do not expose soft tissue to the light being emitted for more than 2 seconds or burns may occur.
- Avoid the light tip coming into contact with any soft tissue in the mouth. As an option, you may cover the entire curing light with a disposable sleeve and then place the Heat Protective Ring (included inside the packing box) onto the light tip covered with sleeve as shown below. Ensure the Heat Protective Ring is securely positioned on the curing light before starting the cure.

12
colours
available:






MaxPiezo 7+ (EMS Type) Portable LED Scaler Set \$880.00
MaxPiezo DS7+ (SATELEC Type) Portable LED Scaler Set \$880.00

REFINE MaxPiezo 7+ / DS7+ PORTABLE LED

- Automatic frequency tracking, real-time feedback
- Extra large, capacity 600 ml water tank for water, chlorhexidine, hydrogen peroxide, sodium hypochlorite etc...
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 8 tips
- Size: W180mm x D180mm x H150mm
- Weight: 1.6 kg (unit only)
- Colour: White

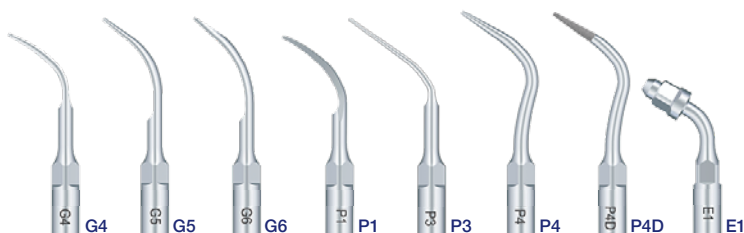

MaxPiezo 6+ (EMS Type) LED Scaler Set \$330.00
MaxPiezo DS6+ (SATELEC Type) LED Scaler Set \$330.00

REFINE MaxPiezo 6+ / DS6+ LED SCALERS

- Automatic frequency tracking, real-time feedback
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 6 tips
- Size: W155mm x D168mm x H80mm
- Weight: 0.6 kg (unit only)
- Colour: White



N3000L (EMS Type) Built-In LED Scaler Set \$275.00
V3000L (SATELEC Type) Built-In LED Scaler Set ... \$275.00

REFINE N3000L / V3000L BUILT-IN LED SCALERS

- Automatic frequency tracking, real-time feedback
- Detachable handpiece
- Frequency: 28 KHz \pm 3 KHz
- Complete with 6 tips



ONE YEAR WARRANTY (except scaler tips)

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France

REFINE SCALER HANDPIECES



HP-3H Non-LED Scaler Handpiece (EMS¹ Type) \$198.00



HS-7H Non-LED Scaler Handpiece (SATELEC² Type) \$220.00



HP-5L LED Scaler Handpiece (EMS¹ Type) \$220.00



HS-7L LED Scaler Handpiece (SATELEC² Type) \$247.50

ONE YEAR WARRANTY

**Buy 2
get
1 FREE**
(same item)

REFINE SCALER TORQUE WRENCHES



TW-1L
For EMS¹,
KAVO PiezoLED⁵,
SATELEC², NSK³
type scalars

each
\$19.80



TS-1L
For SIRONA⁴
type scalars

each
\$19.80



TK-1L
For KAVO⁵,
SONICflex⁵,
SONOsoft⁵
type scalars

each
\$19.80

REFINE SCALER HANDPIECE HOSES



3H Non-LED (EMS¹ Type)
Handpiece Hose ... \$59.95



7H Non-LED (SATELEC² Type)
Handpiece Hose ... \$59.95



5L LED (EMS¹ Type)
Handpiece Hose ... \$68.75



7L LED (SATELEC² Type)
Handpiece Hose ... \$68.75

REFINE ENDO WRENCH



- Multi function wrench for both endo chuck & burs

each
\$14.85

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System
5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany

REFINE SCALER TIP HOLDERS



NO. 1

each
\$27.50



NO. 2

each
\$33.55

E04 ULTRASONIC FILES NiTi alloy



- For use with ultrasonic scaler
- Excellent tenacity
- Length: 33 mm

E04 Ultrasonic Files
Single Size
6 pcs/pack
\$8.80


E04 ULTRASONIC FILES NiTi alloy	
#15 ○	#30 ●
#20 ●	#35 ●
#25 ●	#40 ●

**Buy 5
get
1 FREE**


REFINE SCALER TIPS STAINLESS STEEL

for EMS¹, SATELEC², NSK³ and SIRONA⁴ REFINE Type Scalers


SCALING




G1 (EMS¹ Type)
GD1 (SATELEC², NSK³ Type)
GS1 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants




G4 (EMS¹ Type)
GD4 (SATELEC², NSK³ Type)
GS4 (SIRONA⁴ Type)
Supragingival and
interproximal deposits




G2 (EMS¹ Type)
GD2 (SATELEC², NSK³ Type)
GS2 (SIRONA⁴ Type)
Heavy supragingival
deposits on anterior
teeth



G5 (EMS¹ Type)
GD5 (SATELEC², NSK³ Type)
GS5 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants



G3 (EMS¹ Type)
GD3 (SATELEC², NSK³ Type)
GS3 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants, including the
interproximal and sulcus areas




G6 (EMS¹ Type)
GD6 (SATELEC², NSK³ Type)
GS6 (SIRONA⁴ Type)
Voluminous supragingival
deposits

ENDO



E1 (EMS¹ Type)
ED1 (SATELEC², NSK³ Type)
ES1 (SIRONA⁴ Type)
120°file holder for anterior
root canal irrigation




E4 (EMS¹ Type)
ED4 (SATELEC², NSK³ Type)
ES4 (SIRONA⁴ Type)
Removing root filling obstructions
during root canal retreatment




E2 (EMS¹ Type)
ED2 (SATELEC², NSK³ Type)
ES2 (SIRONA⁴ Type)
95°file holder for molar teeth
root canal irrigation



E4D (EMS¹ Type)
ED4D (SATELEC², NSK³ Type)
ES4D (SIRONA⁴ Type)
Removing calcification and
filling material during
root canal retreatment




E3 (EMS¹ Type)
ED3 (SATELEC², NSK³ Type)
ES3 (SIRONA⁴ Type)
Gutta-percha melting




E5 (EMS¹ Type)
ED5 (SATELEC², NSK³ Type)
ES5 (SIRONA⁴ Type)
Removing root filling obstructions
during root canal retreatment




E3D (EMS¹ Type)
ED3D (SATELEC², NSK³ Type)
ES3D (SIRONA⁴ Type)
Diamond coated instrument for
root canal enlarging




E5D (EMS¹ Type)
ED5D (SATELEC², NSK³ Type)
ES5D (SIRONA⁴ Type)
Removing calcification and
filling material during
canal retreatment



P4D (EMS¹ Type)
PD4D (SATELEC², NSK³ Type)
PS4D (SIRONA⁴ Type)
Diamond coated instrument for
root canal enlarging



E14 (EMS¹ Type)
ED14 (SATELEC², NSK³ Type)
ES14 (SIRONA⁴ Type)
Removing root filling obstructions
during root canal retreatments



E15 (EMS¹ Type)
ED15 (SATELEC², NSK³ Type)
ES15 (SIRONA⁴ Type)
Removing root filling obstructions
during root canal retreatments


**Buy 2
get
1 FREE**
(same number)

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System

REFINE SCALER TIPS STAINLESS STEEL

for EMS¹, SATELEC², NSK³ and SIRONA⁴ Type Scalers


P1 (EMS¹ Type)
PD1 (SATELEC², NSK³ Type)
PS1 (SIRONA⁴ Type)
 Shallow pocket subgingival deposits



P3 (EMS¹ Type)
PD3 (SATELEC², NSK³ Type)
PS3 (SIRONA⁴ Type)
 Deep pocket subgingival deposits



P4 (EMS¹ Type)
PD4 (SATELEC², NSK³ Type)
PS4 (SIRONA⁴ Type)
 Shallow pocket subgingival deposits



P3D (EMS¹ Type)
PD3D (SATELEC², NSK³ Type)
PS3D (SIRONA⁴ Type)
 Diamond coated instrument for root planning after periodontal flap surgery

PERIO



P2L (EMS¹ Type)
PD2L (SATELEC², NSK³ Type)
 Left angle instrument to remove calculus from very narrow inter-root space and furcation



P2R (EMS¹ Type)
PD2R (SATELEC², NSK³ Type)
 Right angle instrument to remove calculus from very narrow inter-root space and furcation



P2LD (EMS¹ Type)
PD2LD (SATELEC², NSK³ Type)
 Removal of calculus from narrow inter-root spaces (diamond-coated)



P2RD (EMS¹ Type)
PD2RD (SATELEC², NSK³ Type)
 Diamond coated instrument for root planning

for AMDENT⁶ Type Scalers

A1 (#37)
 (AMDENT⁶ Type)
 Supragingival scaling



A2 (#39)
 (AMDENT⁶ Type)
 Supragingival scaling

**Buy 2
get
1 FREE**
 (same number)

for KAVO SONICflex⁵ Type Scalers

GK1 (KAVO⁵ Type)
 Supragingival deposits in all quadrants



GK2 (KAVO⁵ Type)
 Supragingival heavy calculus and plaque



GK3 (KAVO⁵ Type)
 Supragingival interdental calculus and calculus at the neck of the tooth




GK4 (KAVO⁵ Type)
 Supragingival deposits, including the interproximal and sulcus areas



GK5 (KAVO⁵ Type)
 Subgingival calculus



GK6 (KAVO⁵ Type)
 Left angle instrument for removing subgingival calculus



GK7 (KAVO⁵ Type)
 Right angle instrument for removing subgingival calculus

for KAVO SONOsoft⁵ Type Scalers

GC1 (KAVO⁵ Type)
 Supragingival deposits in all quadrants




GC2 (KAVO⁵ Type)
 Supragingival interdental calculus and calculus at the neck of the tooth




PC1 (KAVO⁵ Type)
 Subgingival calculus, including the interproximal and sulcus areas

for KAVO PiezoLED⁵ Type Scalers

201 (KAVO⁵ Type)
 Supragingival and interproximal deposits



202 (KAVO⁵ Type)
 Supragingival deposits in all quadrants, including the interproximal and sulcus areas



203 (KAVO⁵ Type)
 Deep pocket subgingival deposits

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
 2. SATELEC is a registered trademark of Satelec/Acteon Group France
 3. NSK is a registered trademark of Nakanishi Inc. Japan
 4. SIRONA is a registered trademark of Sirona Dental System
 5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany
 6. AMDENT is a registered trademark of Amdent AB Sweden

A08 DENTAL APEX LOCATOR



- Bright LCD screen with the trajectory of the file being clearly indicated by different colours
- Foldable design with adjustable view angle, saves space and protects the screen
- The unit is designed with a smooth seamless body and membrane buttons to enhance cold sterilization and help avoid cross contamination
- Advanced multiple frequency technology with automatic calibrating ensures accurate measurement
- Measurement results are not affected by tooth type, size of root canal or the internal environment of root canal
- Different beep tones indicate the position of the file in the root canal
- Rechargeable lithium battery
- Accessories autoclavable up to 134°C
- Screen size: 110 mm x 70 mm
- Overall size: L122 mm x W118 mm x H25 mm
- Weight: 300 gms (including battery)

**24 MONTH
WARRANTY**

A08 Apex Locator \$385.00
A08-1 Battery \$59.95
A08-2 Spare Probe \$38.50

A08-3 Spare Hook \$49.50
A08-4 Spare Cord \$38.50
A08-5 Spare Clip \$49.50

9 colours
available



premiumplus™


**C10 LED & HALOGEN
CURING LIGHT METER**

- Measures intensity up to 2500 mw/cm²
- Size: 110 mm x 68 mm x 33 mm

C10 Light Meter \$59.95

24 MONTH WARRANTY

PREMIUM AP III DENTAL BURNER

- Designed for safe, one handed use
- Battery powered ignition lights instantly with just a press of a button
- Adjustable flame setting and lock-off switch
- Burns up to 30 minutes on one butane fill-up
- Size: 14 cm long

\$396.00/set

**SPECIAL
\$330.00**

**WOODPECKER CURING
LIGHT ACCESSORIES**


Protective
Light Shield
each \$19.80



Curing Light
Depth Gauge
each \$9.90

PREMIUM 17" LCD MONITOR


17" Monitor ... \$678.50

- Low voltage 12V
- Reinforce glass protection for scratch resistance
- Built-in dual speakers
- On screen display control
- Auto adjustment function
- High resolution:- 1280 x 1024
- For VGA, cable TV, DVD etc
- Colour:- White

**SPECIAL
\$395.00**

MONITOR MOUNTS


SHORT ARM

each \$220.00



LONG ARM

each \$275.00

- For 15" or 17" monitor
- fit 45mm post
- Colour:- White
- Metal construction

WOODPECKER PIEZO ULTRASONIC SCALERS with endo function

UDS-E (EMS' TYPE) PORTABLE SCALER UDS-P (EMS' TYPE) TABLE TOP SCALER
UDS-N3 (EMS' TYPE) BUILT-IN SCALER

ARE NOW AVAILABLE WITH LED LIGHT



**UDS-E LED
(EMS' TYPE)
PORTABLE
SCALER**

Complete with 8 Tips
(G1, G4, G5, G6, P1, P3, P4D and E1)

Size:- W24.5 cm x
D19.5 cm x H11 cm

**UDS-E PORTABLE SCALER
HANDPIECE AND TIPS
ARE COMPATIBLE WITH
EMS' TYPE SCALERS**

Medical solution
or distilled water from
self-contained liquid bottle

UDS-E LED Portable Scaler Set **\$990.00**
 Plastic Bottle Large 500 ml **\$33.55**
 Plastic Bottle Small 350 ml **\$33.55**



DETACHABLE HANDPIECE

- Digitally controlled, automatic frequency tracking
- With endo function
- Autoclavable Titanium handpiece with excellent piezo-ceramic vibrations
- Frequency: 28kHz ± 3kHz

12 MONTH WARRANTY
(except scaler tips)

UDS-P LED (EMS' TYPE) SCALER



**UDS-P SCALER
HANDPIECE AND TIPS
ARE COMPATIBLE WITH
EMS' TYPE SCALERS**

UDS-P LED
Table Top Scaler Set
\$396.00

Complete with 6 Tips
(G1x2, G2, G4, P1 and E1)
Size:- W18 cm x D14.5 cm x H9 cm



UDS-N3 LED KIT (EMS' TYPE)



DTE-V3 LED KIT (SATELEC² TYPE)



Size:- W8 cm x D6 cm x H4 cm

UDS-N3 LED Kit (EMS' Type) Built-in LED Scaler with 6 Tips
(G1T x 2, G2T, G4T, P1T and E1T) **\$396.00**

DTE-V3 LED Kit (SATELEC² Type) Built-in LED Scaler with 6 Tips
(GD1T x 2, GD2T, GD4T, PD1T and ED1T) **\$396.00**

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France

WOODPECKER TITANIUM SCALER HANDPIECES



HW-3H (Woodpecker, EMS' Type) Non-LED Scaler Handpiece .. **\$247.50**



HD-7H (DTE, SATELEC² Type) Non-LED Scaler Handpiece .. **\$275.00**



HW-5L (Woodpecker, EMS' Type) LED Scaler Handpiece **\$275.00**



HD-7L (DTE, SATELEC² Type) LED Scaler Handpiece **\$291.50**

12 MONTH WARRANTY

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France



WOODPECKER SCALER TIPS STAINLESS STEEL for WOODPECKER, EMS¹, DTE, SATELEC², NSK³ or SIRONA⁴ Type Scalers

SCALING



G1 (WOODPECKER, EMS¹ Type)
GD1 (DTE, SATELEC², NSK³ Type)
GS1 (SIRONA⁴ Type)
Supragingival Scaling
each \$33.55



G4 (WOODPECKER, EMS¹ Type)
GD4 (DTE, SATELEC², NSK³ Type)
GS4 (SIRONA⁴ Type)
Supragingival Scaling
each \$39.60



G2 (WOODPECKER, EMS¹ Type)
GD2 (DTE, SATELEC², NSK³ Type)
GS2 (SIRONA⁴ Type)
Supragingival Scaling
each \$33.55



G5 (WOODPECKER, EMS¹ Type)
GD5 (DTE, SATELEC², NSK³ Type)
GS5 (SIRONA⁴ Type)
Supragingival Scaling
each \$39.60



G3 (WOODPECKER, EMS¹ Type)
GD3 (DTE, SATELEC², NSK³ Type)
GS3 (SIRONA⁴ Type)
Supragingival Scaling
each \$39.60



G6 (WOODPECKER, EMS¹ Type)
GD6 (DTE, SATELEC², NSK³ Type)
GS6 (SIRONA⁴ Type)
Supragingival Scaling
each \$39.60



P1 (WOODPECKER, EMS¹ Type)
PD1 (DTE, SATELEC², NSK³ Type)
PS1 (SIRONA⁴ Type)
Periodontal Scaling
each \$39.60



P2L (WOODPECKER, EMS¹ Type)
Periodontal Scaling
each \$49.50




P3 (WOODPECKER, EMS¹ Type)
PD3 (DTE, SATELEC², NSK³ Type)
PS3 (SIRONA⁴ Type)
Periodontal Scaling
each \$44.55



P2R (WOODPECKER, EMS¹ Type)
Periodontal Scaling
each \$49.50



P4 (WOODPECKER, EMS¹ Type)
PD4 (DTE, SATELEC², NSK³ Type)
PS4 (SIRONA⁴ Type)
Periodontal Scaling
each \$49.50



P2LD (WOODPECKER, EMS¹ Type)
PD2LD (DTE, SATELEC², NSK³ Type)
Remove calculus from narrow
inter-root spaces (diamond-coated)
each \$59.95



P3D (WOODPECKER, EMS¹ Type)
PD3D (DTE, SATELEC², NSK³ Type)
PS3D (SIRONA⁴ Type)
Smoothing restoration overhangs
and debride in-depth root (diamond-coated)
each \$59.95



P2RD (WOODPECKER, EMS¹ Type)
PD2RD (DTE, SATELEC², NSK³ Type)
Remove calculus from narrow
inter-root spaces (diamond-coated)
each \$59.95

C&B



GD7 (DTE, SATELEC², NSK³ Type)
Crown Removal
each \$49.50



CAVITY PREPARATION



SB1 (WOODPECKER, EMS¹ Type)
SBD1 (DTE, SATELEC², NSK³ Type)
For occlusal surface and cervical
margins preparation
each \$59.95



SBL (WOODPECKER, EMS¹ Type)
SBDL (DTE, SATELEC², NSK³ Type)
Half ball diamond tip. Set 45° to
the left, to remove the carious teeth
without damaging the adjacent teeth.
each \$59.95



SB2 (WOODPECKER, EMS¹ Type)
SBD2 (DTE, SATELEC², NSK³ Type)
Remove the carious teeth without
damaging the adjacent teeth
each \$59.95




SBR (WOODPECKER, EMS¹ Type)
SBDL (DTE, SATELEC², NSK³ Type)
Half ball diamond tip. Set 45° to
the right, to remove the carious teeth
without damaging the adjacent teeth.
each \$59.95



SB3 (WOODPECKER, EMS¹ Type)
SBD3 (DTE, SATELEC², NSK³ Type)
Remove the carious teeth without
damaging the adjacent teeth
each \$59.95




1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System

WOODPECKER SCALER TIPS STAINLESS STEEL for WOODPECKER, EMS¹, DTE, SATELEC², NSK³ or SIRONA³ Type Scalers

		ENDO		
	E1 (WOODPECKER, EMS ¹ Type) ED1 (DTE, SATELEC ² , NSK ³ Type) ES1 (SIRONA ⁴ Type) 120° Endo Holder, for root canal cleaning each \$44.55		E14 (WOODPECKER, EMS ¹ Type) ED14 (DTE, SATELEC ² , NSK ³ Type) ES14 (SIRONA ⁴ Type) Remove obstructions and broken instruments in the root canal, with irrigation each \$59.95	
	E2 (WOODPECKER, EMS ¹ Type) ED2 (DTE, SATELEC ² , NSK ³ Type) ES2 (SIRONA ⁴ Type) 95° Endo Holder, for root canal cleaning each \$44.55		E15 (WOODPECKER, EMS ¹ Type) ES15 (SIRONA ⁴ Type) Remove root canal fillings and broken instruments in the coronal third, with irrigation each \$59.95	
	E3 (WOODPECKER, EMS ¹ Type) ED3 (DTE, SATELEC ² , NSK ³ Type) ES3 (SIRONA ⁴ Type) For the lateral thermal condensation of gutta-percha each \$44.55 <small>[Comparable with EMS¹ Type H NSK³ E6 Satelec² #S07]</small>		E4 (WOODPECKER, EMS ¹ Type) ED4 (DTE, SATELEC ² , NSK ³ Type) ES4 (SIRONA ⁴ Type) Remove obstructions and broken instruments in the root canal each \$59.95	
	E3D (WOODPECKER, EMS ¹ Type) ED3D (DTE, SATELEC ² , NSK ³ Type) ES3D (SIRONA ⁴ Type) Used to remove the calcification and filling material of pulp cavity (diamond-coated) each \$59.95 <small>[Comparable with NSK³ E7D Satelec² #ET18D]</small>		E4D (WOODPECKER, EMS ¹ Type) ED4D (DTE, SATELEC ² , NSK ³ Type) For retreatments and remove hard materials (diamond-coated) each \$68.75	
	P4D (WOODPECKER, EMS ¹ Type) PD4D (DTE, SATELEC ² , NSK ³ Type) PS4D (SIRONA ⁴ Type) Remove calcification in the coronal third of the root canal (diamond-coated) each \$59.95 <small>[Comparable with Satelec² #PM4]</small>		E5 (WOODPECKER, EMS ¹ Type) ED5 (DTE, SATELEC ² , NSK ³ Type) Remove root canal fillings and broken instruments in the coronal third each \$59.95	
	E10D (WOODPECKER, EMS ¹ Type) ED10D (DTE, SATELEC ² , NSK ³ Type) Used for root canal retrogression, efficient root apical polishing (diamond-coated) each \$68.75		E5D (WOODPECKER, EMS ¹ Type) ED5D (DTE, SATELEC ² , NSK ³ Type) Remove dental overhangs in the pulp chamber (diamond-coated) each \$68.75	
	E8 (WOODPECKER, EMS ¹ Type) ED8 (DTE, SATELEC ² , NSK ³ Type) Bur Holder, to enlarge root canal each \$59.95			
	E9 (WOODPECKER, EMS ¹ Type) Bur Holder, to enlarge root canal each \$59.95			

**Buy 2
get
1 FREE**
(same number)

WOODPECKER SCALER TIPS STAINLESS STEEL for AMDENT⁶ Type Scaler

	A1 (AMDENT ⁶ Type) Supragingival Scaling (#37) each \$68.75		A1T (AMDENT ⁶ Type) Titanium Coated Supragingival Scaling (#37) each \$77.55
	A2 (AMDENT ⁶ Type) Supragingival Scaling (#39) each \$68.75		

1 EMS is a registered trademark of Electro Medical System S.A. Switzerland
2 SATELEC is a registered trademark of Satelec/Acteon Group France
3 NSK is a registered trademark of Nakanishi Inc. Japan
4 SIRONA is a registered trademark of Sirona Dental System
6 AMDENT is a registered trademark of Amdent AB Sweden

WOODPECKER SCALER TIPS STAINLESS STEEL **TITANIUM COATED** Non-Sticky, Longer Lasting for WOODPECKER, EMS¹, DTE, SATELEC², NSK³ Type Scalers

SCALING



G1T (WOODPECKER, EMS¹ Type)
GD1T (DTE, SATELEC², NSK³ Type)
Supragingival Scaling
each **\$38.50**



G2T (WOODPECKER, EMS¹ Type)
GD2T (DTE, SATELEC², NSK³ Type)
Supragingival Scaling
each **\$38.50**



G3T (WOODPECKER, EMS¹ Type)
GD3T (DTE, SATELEC², NSK³ Type)
Supragingival Scaling
each **\$44.55**



G4T (WOODPECKER, EMS¹ Type)
GD4T (DTE, SATELEC², NSK³ Type)
Supragingival Scaling
each **\$44.55**



G5T (WOODPECKER, EMS¹ Type)
GD5T (DTE, SATELEC², NSK³ Type)
Supragingival Scaling
each **\$44.55**



G6T (WOODPECKER, EMS¹ Type)
GD6T (DTE, SATELEC², NSK³ Type)
Supragingival Scaling
each **\$44.55**

PERIO



P1T (WOODPECKER, EMS¹ Type)
PD1T (DTE, SATELEC², NSK³ Type)
Periodontal Scaling
each **\$44.55**



P3T (WOODPECKER, EMS¹ Type)
PD3T (DTE, SATELEC², NSK³ Type)
Periodontal Scaling
each **\$49.50**



P4T (WOODPECKER, EMS¹ Type)
PD4T (DTE, SATELEC², NSK³ Type)
Periodontal Scaling
each **\$49.50**



PD2LT (DTE, SATELEC², NSK³ Type)
Periodontal Scaling
each **\$77.55**



PD2RT (DTE, SATELEC², NSK³ Type)
Periodontal Scaling
each **\$77.55**

**Buy 2
get
1 FREE**
(same number)

ENDO



E1T (WOODPECKER, EMS¹ Type)
ED1T (DTE, SATELEC², NSK³ Type)
120° Endo Holder, for root canal
cleaning
each **\$59.95**



E2T (WOODPECKER, EMS¹ Type)
ED2T (DTE, SATELEC², NSK³ Type)
95° Endo Holder, for root canal
cleaning
each **\$59.95**



E8T (WOODPECKER, EMS¹ Type)
Bur Holder, to enlarge root canal
each **\$68.75**



E3T (WOODPECKER, EMS¹ Type)
For the lateral thermal
condensation of gutta-percha
each **\$77.55**



ED4T (DTE, SATELEC², NSK³ Type)
Remove obstructions and
broken instruments in the
root canal
each **\$77.55**



E5T (WOODPECKER, EMS¹ Type)
ED5T (DTE, SATELEC², NSK³ Type)
Remove root canal fillings and
broken instruments in the
coronal third
each **\$77.55**

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan



WOODPECKER LED.G BUILT-IN CURING LIGHT (5 WATTS)



LED.G Built-in 24V

LED. G Built-in 24V **\$198.00**
LED Light Guide 8mm **\$59.95**
Protective Light Shield **\$19.80**

- Working time:- 10 seconds
- Three work modes:- **Full, Ramping, Pulse**
- Autoclavable Light Guide 8mm
- Light weight:- 90-135gms
- Attractive slim design
- Sizes:- L250mm x Dia. 31-34mm
- Complete with protective light shield and composite curing depth gauge

WOODPECKER SCALER TIPS STAINLESS STEEL for KAVO⁵ Type Scalers



each \$68.75

GK1 (KAVO⁵ Type)
SONICflex⁵ Type
Supragingival and
Subgingival Scaling




each \$68.75

GK2 (KAVO⁵ Type)
SONICflex⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

GK3 (KAVO⁵ Type)
SONICflex⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

GK4 (KAVO⁵ Type)
SONICflex⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

GK5 (KAVO⁵ Type)
SONICflex⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

GK6 (KAVO⁵ Type)
SONICflex⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

GK7 (KAVO⁵ Type)
SONICflex⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

EK8 (KAVO⁵ Type)
SONICflex⁵ Type
Bur Holder, to enlarge
root canal



each \$68.75

GC1 (KAVO⁵ Type)
SONOsoft⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

GC2 (KAVO⁵ Type)
SONOsoft⁵ Type
Supragingival and
Subgingival Scaling



each \$68.75

PC1 (KAVO⁵ Type)
SONOsoft⁵ Type
Subgingival Scaling



WOODPECKER TORQUE WRENCHES

- Autoclavable
- Holds Scaler tip inside
- Colour: White

TW-1L Torque Wrench (WOODPECKER, EMS¹ Type) \$27.50
TD-1L Torque Wrench (DTE, SATELEC², NSK³ Type) \$27.50
TS-1L Torque Wrench (SIRONA⁴ Type) \$27.50

Buy 2
get
1 FREE
(same number)

WOODPECKER SCALER ACCESSORIES



each \$19.80



each \$22.55



each \$33.00



each \$38.50

WOODPECKER SCALER HANDPIECE CABLES



Scaler Handpiece Cable
(WOODPECKER, EMS¹ Type) ... \$68.75
Scaler Handpiece Cable
(DTE, SATELEC² Type) \$68.75
LED Scaler Handpiece Cable
(WOODPECKER, EMS¹ Type) ... \$79.75
LED Scaler Handpiece Cable
(DTE, SATELEC² Type) \$79.75

WOODPECKER SCALER U-FILES

- Excellent tenacity
- 6 pieces per tube
- Length: 32.5 mm

U-Files, 6 pcs/tube
No.20, 30, 35 \$16.50

CLEARANCE
SALE
50% OFF
MARKED PRICE
[offer subject to
stock availability]



1 EMS is a registered trademark of Electro Medical System S.A. Switzerland
2 SATELEC is a registered trademark of Satelec/Acteon Group France
3 NSK is a registered trademark of Nakanishi Inc. Japan
4 SIRONA is a registered trademark of Sirona Dental System
5. KAVO, SONICflex, SONOsoft are registered trademarks of
Kavo Dental GmbH Germany

REFINE SCALER HANDPIECES



HP-3H Non-LED Scaler Handpiece (EMS Type) \$198.00



HS-7H Non-LED Scaler Handpiece (SATELEC Type) \$220.00



HP-5L LED Scaler Handpiece (EMS Type) \$220.00



HS-7L LED Scaler Handpiece (SATELEC Type) \$247.50

ONE YEAR WARRANTY

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France

Buy 2
get
1 FREE
(same item)

REFINE AUTOCLAVABLE SCALER HANDPIECE KITS



- Complete with:-
- 1x Handpiece 3H / 5L / 7H / 7L
- 3x Perio scaler tip P1 / PD1
- 1x Torque wrench TW-1L
- 1x Scaler tip holder No.1
- 1x Sterilization box



- 3H Non-LED Handpiece Kit (EMS Type) \$295.00
 7H Non-LED Handpiece Kit (SATELEC Type) \$330.00
 5L LED Handpiece Kit (EMS Type) \$330.00
 7L LED Handpiece Kit (SATELEC Type) \$380.00
 (for handpiece connections, please refer to above)

SPECIAL


- | | |
|--------------|----------|
| 3H Kit | \$198.00 |
| 7H Kit | \$220.00 |
| 5L (LED) Kit | \$220.00 |
| 7L (LED) Kit | \$247.50 |

REFINE MaxPiezo 7+ / DS7+ PORTABLE LED SCALERS



- Automatic frequency tracking, real-time feedback
- Extra large, capacity 600 ml water tank for water, chlorhexidine, hydrogen peroxide, sodium hypochlorite etc...
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 8 tips as shown
- Size: W180mm x D180mm x H150mm
- Weight: 1.6 kg (unit only)
- Colour: White

- MaxPiezo 7+ (EMS Type) Portable LED Scaler Set \$880.00
 MaxPiezo DS7+ (SATELEC Type) Portable LED Scaler Set ... \$880.00

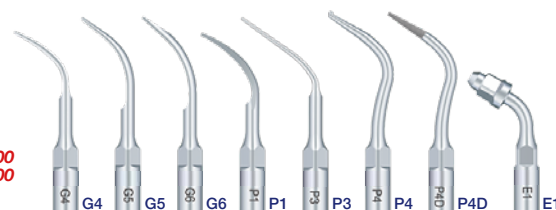

REFINE MaxPiezo 6+ / DS6+ LED SCALERS



- Automatic frequency tracking, real-time feedback
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 6 tips as shown
- Size: W155mm x D168mm x H80mm
- Weight: 0.6 kg (unit only)
- Colour: White

- MaxPiezo 6+ (EMS Type) LED Scaler Set \$330.00
 MaxPiezo DS6+ (SATELEC Type) LED Scaler Set \$330.00



ONE YEAR WARRANTY (except scaler tips)

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France